PC Based
High Speed Labeller

Model : TSHC700

PC based high speed labeller for high resolution label printing. Featuring a full colour TFT touch screen display and on board help videos. Stainless steel frame for ease of cleaning and hygiene. IP65 ingress protection rating.

FEATURES

- user friendly, full colour TFT touch screen display
- printing by 80 mm wide, 300 DPI thermal head providing high print resolution, and true type window print fonts
- modular 304 stainless steel open frame design conveyor, enhanced ease of cleaning and hygiene, IP-65 rated
- quick release conveyors & belts, removed easily without tools
- on board help screens & videos includes programming, label roll changes, maintenance & fault finding
- Windows XP embedded, 20 Gb hard drive, 256 M Ram, Intel Celeron processor
- USB memory back up

OPTIONS

- additional top or bottom labellers for promotion or supplementary labels to show ingredients or similar information
- 108 mm, 300 DPI thermal head
- interchangeable V Deck conveyor for round shaped products
- TSHI700.NET back office data maintenance
- controlling software via Ethernet network



Specifications may change without notice


1300 970 111
enquiries@wedderburn.com.au
www.wedderburn.com.au

PC Based High Speed Labeller

Model : TSHC700

SPECIFICATIONS

Package Size	Length: 80 - 300 mm Width: 40 - 250 mm Height: 180 mm Maximum
Label Size	Minimum: 30 mm wide x 28 mm high Maximum: 120 mm wide x 150 mm high
Label Roll	300 mm outside diameter, 76 mm core, inside or outside wound
Label Application	by 10 finger touch applicator
Print Method	direct thermal, 300 DPI or 12 dots/mm
Operating Speed	90 packs/min for 100mm high label speed is dependent on label length and printer information
HDD Capacity	20 GB
Power Requirements	240V AC 50 Hz single phase
Air Requirements	Minimum 4 bar at 50 to 300 litres/min external clean, dry air
IP Protection	Console: to IP65 standard Labeller: to IP43 standard Conveyor: to IP65 standard
Operating Temp.	0 to +40 degrees celsius
Operating Humidity	15 to 85% RH

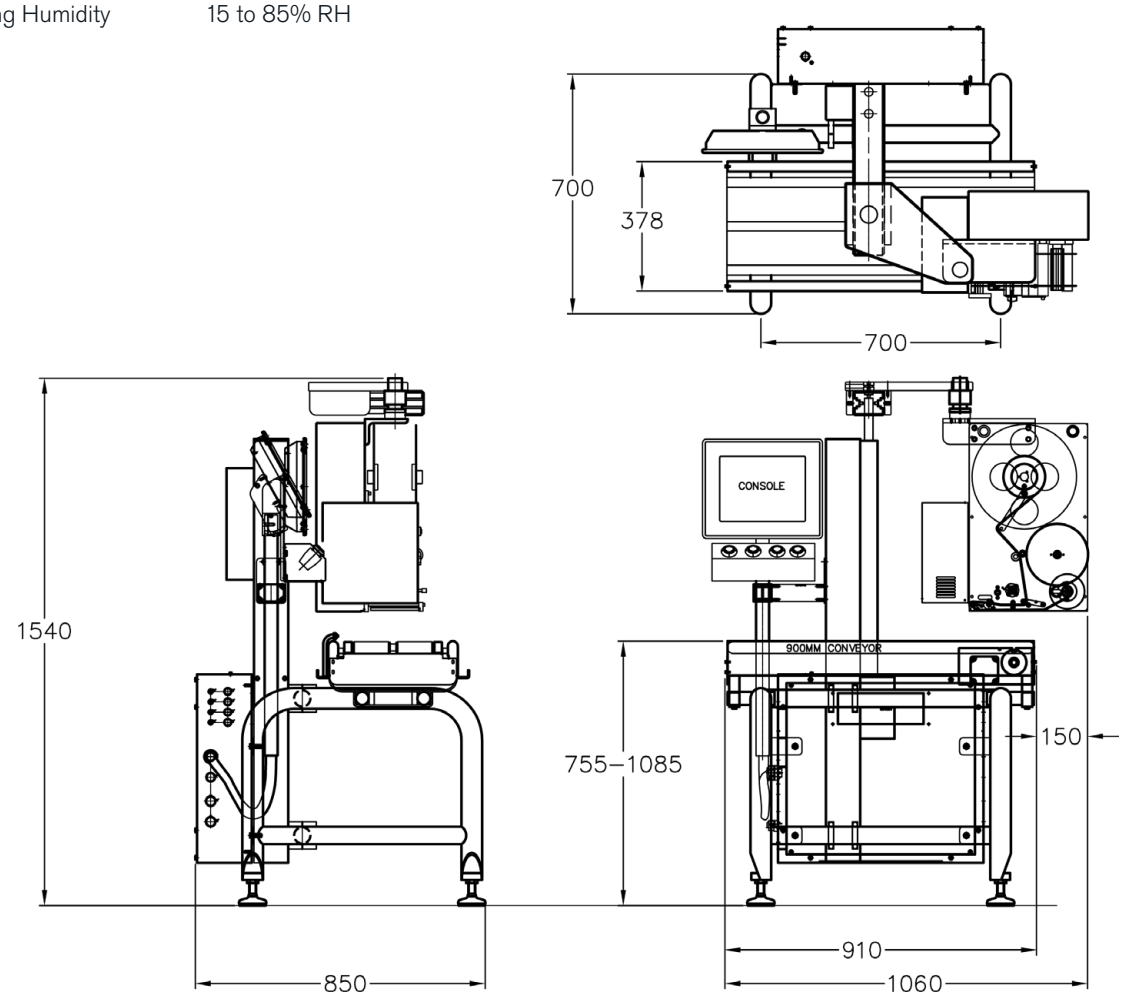

Specifications may change without notice

1300 970 111
enquiries@wedderburn.com.au
www.wedderburn.com.au