

Manual Food Slicer

Model : WFS30MGB3

Heavy duty manual slicer, versatile and robust yet compact to suit many business sizes. Featuring a blade safety ring and an optional blade cover.

FEATURES

WFS30MGB3

- peizo switches that are resistant to water and to harsh environments
- versatile slicer – very robust, yet with a small footprint to suit many business sizes
- excellent product holding features
- patented Poly-V belt drive with automatic tensioner - NO belt slippage
- extremely quiet and smooth drive system
- salami holder: an additional adjustable “fence” to keep round products stable when slicing
- integral sharpener: safe, effective and always at hand to regularly sharpen the blade
- ample operator access for fast cleanup of food debris behind blade
- attractive highly polished anodised aluminium alloy construction allows easy cleaning and better hygiene

OPTION

- teflon coated gauge plate, blade and blade cover

SAFETY FEATURES

- blade safety ring: the blade is completely shrouded by a metal safety guard
- safety interlock: the carriage interlock does not allow tilting of the carriage unless the index knob is set to zero. This prevents the blade from being exposed whilst cleaning, thereby reducing risk of injury
- power fail safe: if mains power fails and is resumed, the slicer will not start until the slicer “on” button is re-selected by the operator. There is no risk of the slicer starting inadvertently
- no blade removal required: a large gap between the blade and motor housing allows easy access behind the blade for cleaning. There is no need for an operator to remove the blade
- CE Approved: this means the highest standards of design and manufacture have been adhered to for optimal levels of safety for the user



SPECIFICATIONS



Model Number	Blade Diameter (mm)	Slice Thickness (mm)	Overall Dimensions (mm)
WFS30MGB3	300	0 - 15	365 (W) x 460 (D) x 455 (H)

Specifications may change without notice

ADDITIONAL SPECIFICATIONS


WFS30MGB3

Maximum product diameter (mm):	210
Dimensions (mm)	
Footprint:	365 (W) x 455 (D)
Working area required:	530 (W) x 670 (D)
Motor:	IP65 rated water resistant
Switches:	IP69 rated water resistant
Net weight:	31.0 kg

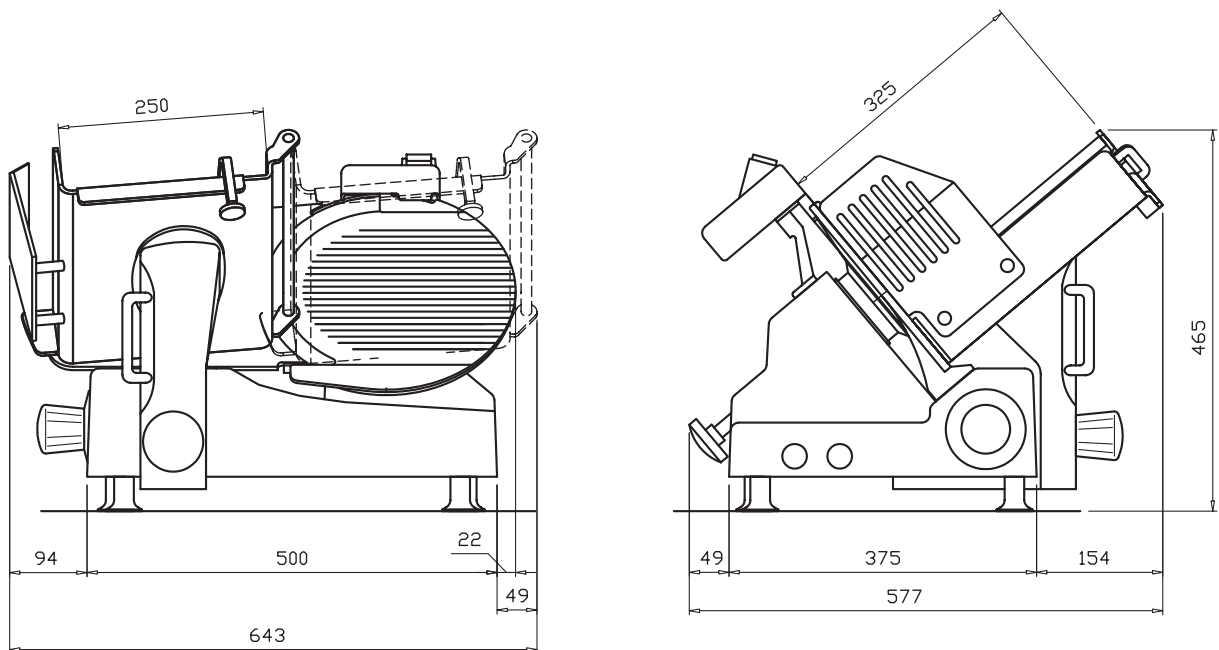

MAX. CUTTING SIZE:

 MAX. CUTTING SETTING: 15 mm

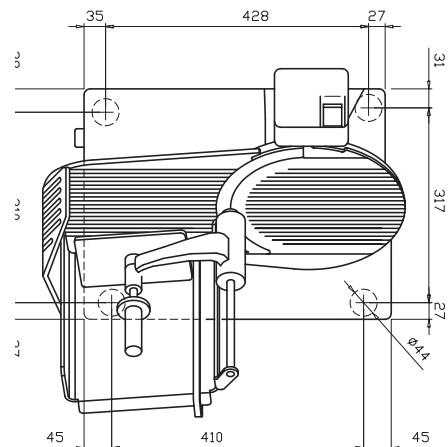

Specifications may change without notice