

PC Based High Speed Labeller

Model : TSHC700

PC based high speed labeller for high resolution label printing.
Featuring a full colour TFT touch screen display and on board help videos. Stainless steel frame for ease of cleaning and hygiene.
IP65 ingress protection rating.


FEATURES

TSHC700

- user friendly, full colour TFT touch screen display
- printing by 80mm wide, 300 DPI thermal head providing high print resolution, and true type window print fonts
- modular 304 stainless steel open frame design conveyor, enhanced ease of cleaning and hygiene, IP-65 rated
- quick release conveyors & belts, removed easily without tools
- on board help screens & videos includes programming, label roll changes, maintenance & fault finding
- Windows XP embedded, 20Gb hard drive, 256 M Ram, Intel Celeron processor
- USB memory back up

OPTIONS


- additional top or bottom labellers for promotion or supplementary labels to show ingredients or similar information
- 108mm, 300 DPI thermal head
- interchangeable V Deck conveyor for round shaped products
- TSHI700.NET back office data maintenance controlling software via Ethernet network

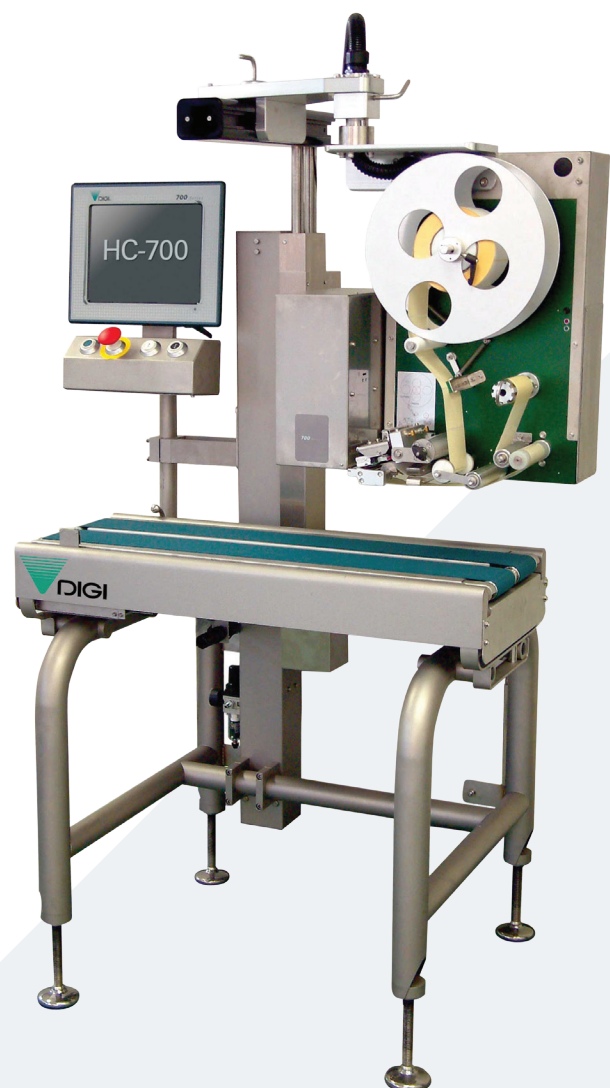

Specifications may change without notice

SPECIFICATIONS

Package Size	Length: 80 - 300mm Width: 40 - 250mm Height: 180mm Maximum
Label Size	Minimum: 30mm wide x 28mm high Maximum: 120mm wide x 150mm high
Label Roll	300mm outside diameter, 76mm core, inside or outside wound
Label Application	by 10 finger touch applicator
Print Method	direct thermal, 300 DPI or 12 dots/mm
Operating Speed	90 packs/min for 100mm high label speed is dependent on label length and printer information
HDD Capacity	20GB
Power Requirements	240V AC 50 Hz single phase
Air Requirements	Minimum 4 bar at 50 to 300 litres/min external clean, dry air
IP Protection	Console: to IP65 standard Labeller: to IP43 standard Conveyor: to IP65 standard
Operating Temp.	0 to +40 degrees celsius
Operating Humidity	15 to 85% RH

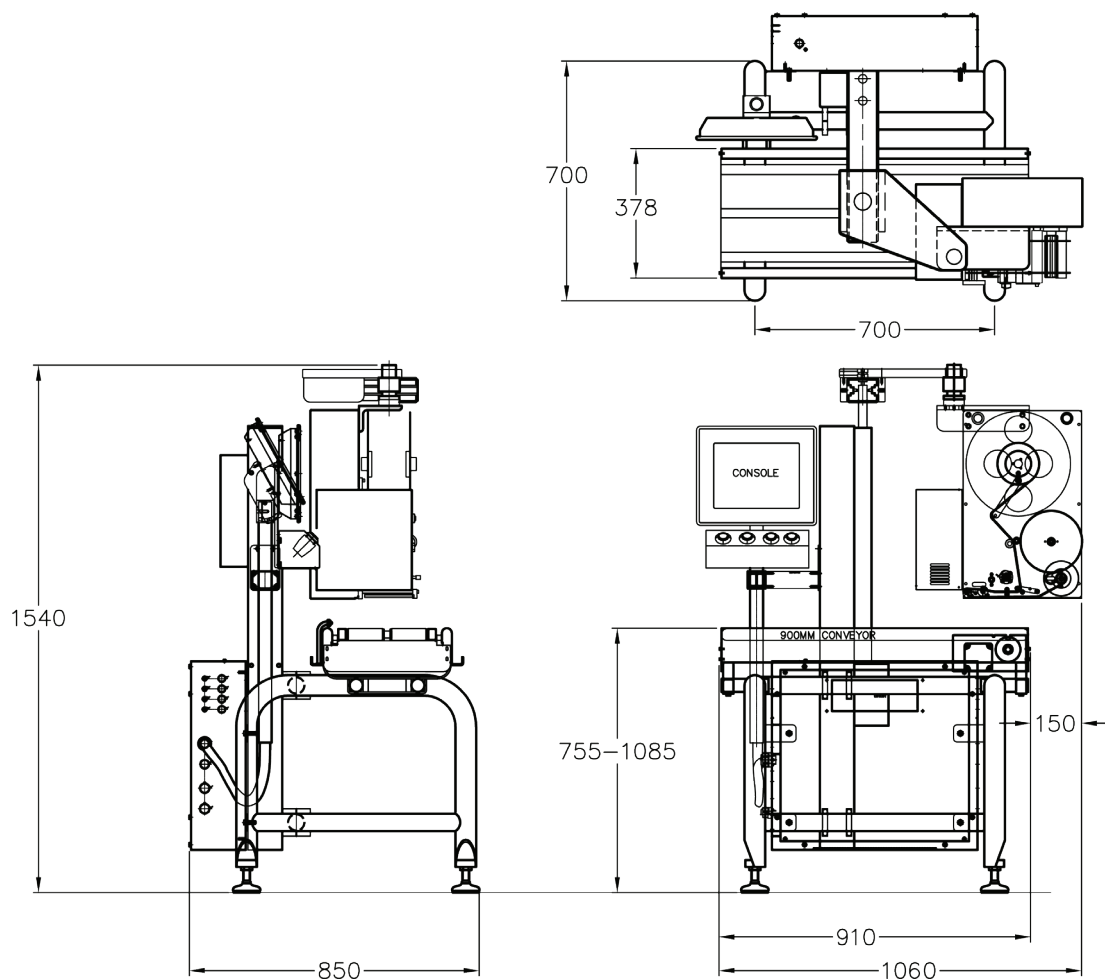

Specifications may change without notice