

PC Based Wide Belt Weigh Labeller

Model : TSWI700

PC Based weigh labeller which is able to handle pack widths of up to 350mm. Its modular design allows for additional top, bottom or promotional labellers to be added at any time.

FEATURES

TSWI700

- NMI approved for trade use
- user friendly, full colour TFT touch screen display
- printing by 80mm wide, 300 DPI thermal head providing high print resolution and true type window print fonts
- capability to process trays or packs, wide edge leading to a maximum width of 350mm
- standalone 304 stainless steel open frame design conveyor, enhanced ease of cleaning and hygiene, IP-65 rated
- quick release conveyors & belts, removed easily without tools
- under/over setpoint linked to label print on in-range products (selectable for each PLU)
- on board help screens & videos includes programming, label roll changes, maintenance and fault finding
- Windows XP embedded, 20Gb hard drive, 256 MB Ram, Intel Celeron processor
- USB memory back up

OPTIONS


- additional bottom labeller for promotional or supplementary labels to show ingredients, barcode or even the application of the primary price and barcode label
- 108mm, 300 DPI thermal head
- TSHI700.NET back office data maintenance controlling software via Ethernet network



Specifications may change without notice

SPECIFICATIONS

Capacity	Up to 6kg x 2g	
Package Size	Length:	80 - 300mm
	Width:	40 - 350mm
Label Size	Minimum:	30mm wide x 28mm high
	Maximum:	120mm wide x 150mm high
Label Roll	300mm outside diameter, 76mm core, inside or outside wound	
Label Application	By 10 finger touch applicator	
Print Method	Direct thermal, 300 DPI or 12 dots/mm	
Operating Speed	70 packs/min for 110mm high label ≤ 3kg capacity	
	60 packs/min for 110mm high label > 3kg capacity	
	Speed is dependent on label length and printed information	
HDD Capacity	20GB	
Power Requirements	240V AC 50 Hz single phase	
Air Requirements	Minimum 4 bar at 50 to 300 litres/min external clean, dry air	
IP Protection	Console:	to IP65 standard
	Labeller:	to IP43 standard
	Conveyor:	to IP65 standard
Operating Temp.	0 to +40 degrees celsius	
Operating Humidity	15 to 85% RH	

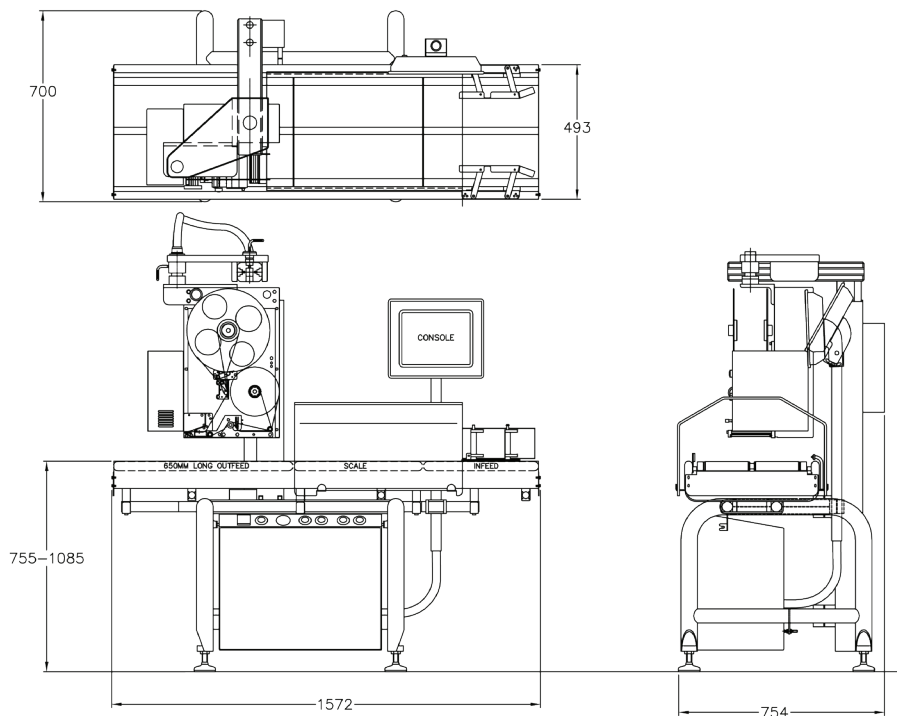

Specifications may change without notice