

PC Based Mid Speed In-Line Weigh Labeller - Cassette

Model : TSLI700DTC

Increase your throughput with the LI700DTC mid speed in line weigh labeller. With PC touch screen operation, quick change cassette style labeller, single framed compact design and operating speed up to 65ppm it offers a cost effective solution for almost all food weigh price labelling requirements.

FEATURES

TSLI700DTC

- NMI approved for trade use
- ability to provide Random Weight, A.Q.S or E mark and fixed weight operation
- user friendly, full colour TFT touch screen display
- quick change Top Cassette Style labeller, reliable and cost effective suitable for inside or outside wound labels
- unique Cassette ID to ensure correct labels are loaded for selected product
- printing by 80 mm wide 300 dpi thermal head providing high print resolution and TrueType Windows print fonts
- modular 304 stainless steel open frame design conveyor, enhanced ease of cleaning and hygiene
- under/over setpoint linked to label print on in-range products (selectable for each PLU)
- on board help screens & videos include programming, label roll changes, maintenance and fault finding
- Windows 10 embedded, 40 GB hard drive, 2 GB RAM, Intel Bay Trail N2930
- USB memory back up

SPECIFICATIONS

Capacities: 6 kg x 1 g
 10 kg x 2 g

OPTIONS

- interchangeable V deck conveyors for round shaped products
- long scale conveyor versions for items up to 475 mm in length
- single or twin sweep arm rejectors
- cassette bottom labeller




11 touch fingers
for accurate label application
across all product shapes

Specifications may change without notice

ADDITIONAL SPECIFICATIONS

TSLI700DTC

Package Size	Length: 80 - 300 mm Width: 40 - 250 mm Height: 180 mm Maximum
Label Roll	190 mm outside diameter, 76 mm core, inside or outside wound
Label Application	by 11 finger touch positive applicator and Bottom Label by wipe on application
Print Method	direct thermal, 80 mm wide 300 dpi (11.8 dots/mm)
Label Size Top Label	Minimum: 40 mm wide x 28 mm high Maximum: 80 mm wide x 120 mm high
Label Size Bottom Label	Minimum: 40 mm wide x 28 mm high Maximum: 80 mm wide x 100 mm high
Operating Speed	up to 65 packs/minute (speed is dependent on label length and printer information)
HDD Capacity	40 GB
Power Requirements	240V AC 50 Hz single phase
Air Requirements	Minimum 4 bar at 50 to 300 litres/min external clean, dry air
IP Protection	Console: to IP65 standard Labeller: to IP43 standard Conveyor: to IP65 standard
Operating Temp.	0 to +30 degrees Celsius
Operating Humidity	15 to 85% RH

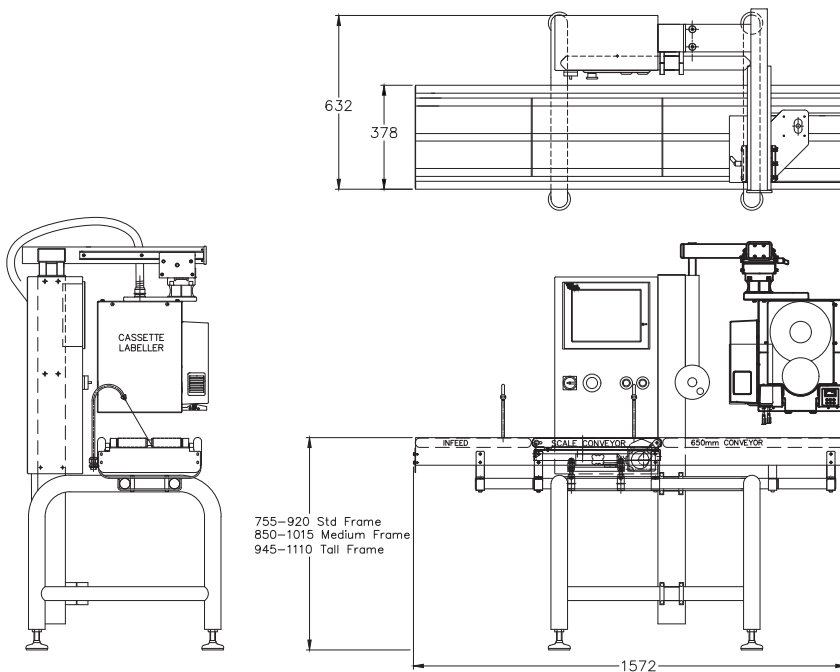

Optional Top & Bottom Variant

Specifications may change without notice